




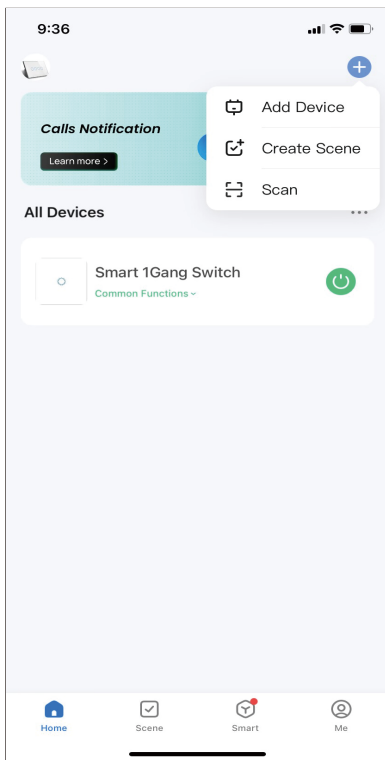


Add the device

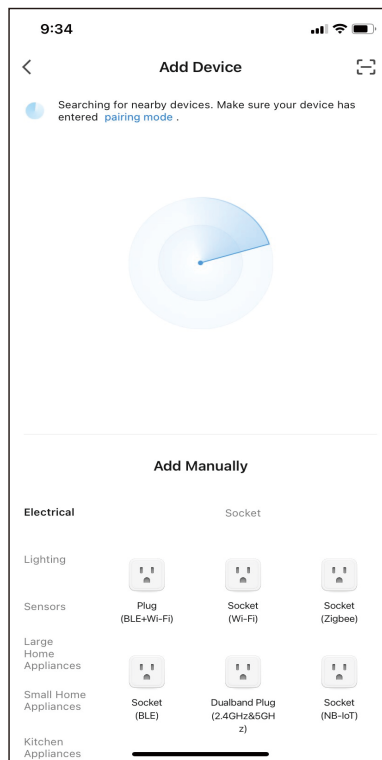


Search the device

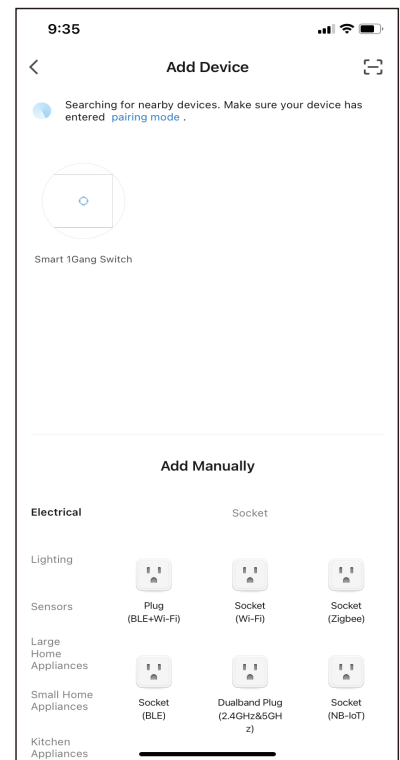

Find the device

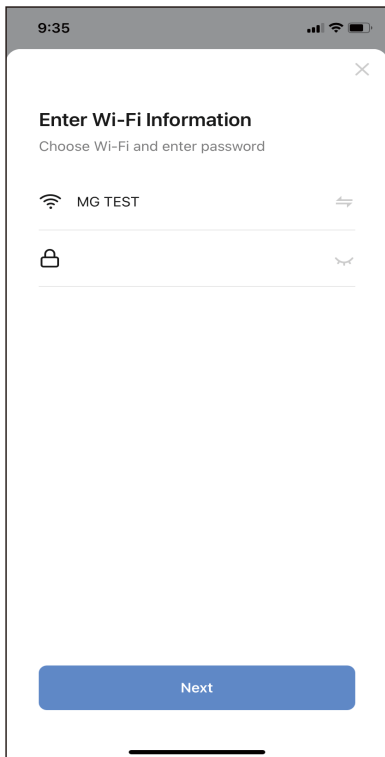


Enter password

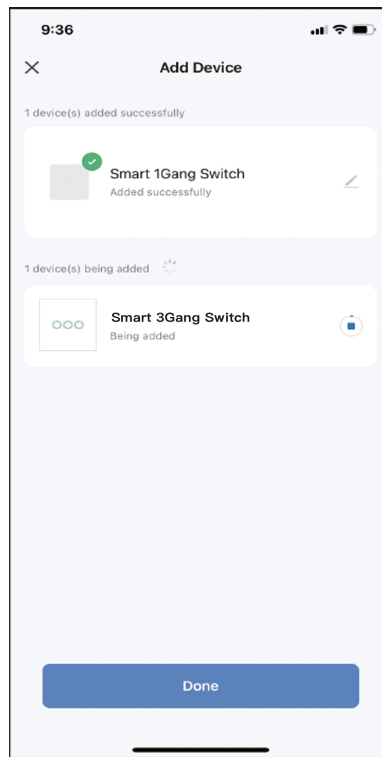

Finished



Turn on/off the switch

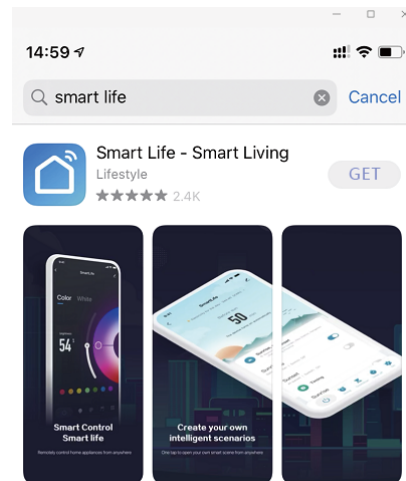

Open the Smart Life app. For new users, register a new account or if existing user, login with your user name and password.

Add smart switch to your App


- ① Arrange installation of your smart switch by a licensed electrical contractor (refer installation instructions at start of this manual).
- ② Once safely wired and powered on, click on/off button five times consecutively and rapidly then hold the button for 5 seconds until the buttons start to blink rapidly.
- ③ Open "Smart Life", Click top right "+"
Then choose "Electricain" -- "Switch (BLE+Wi-Fi)"
or turn on mobile bluetooth, it will search the device automatically

Attention :

If you make touch testing without glass panel cover please turn off general power after testing ,then put on glass panel cover to switch and turn on general power again

How is the DIP switch wokring

- ① Pls turn off main power before toggling the DIP switch,settings won't be activated when power is on.
- ② Activate 2way function when DIP switch is on
- ③ Up to 5-way switching,the first 6gangs comp-atible with 2way by control cable or app association, the remaining by app association.

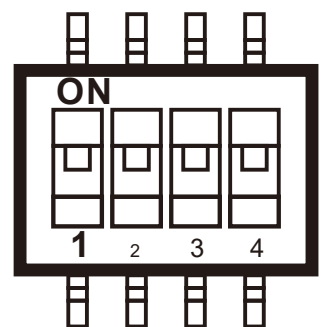


Connect to your Wifi

Ensure your mobile phone is connected to your 2.4GHz Wifi network.Your mobile phone and your smart switch needs to be within good signal strength range of your Wifi router.
(Refer to your router specifications for max range.)

Download&Register the APP


Please download the free app from the App store or Google Play store,or scan the QR code below.

④ Fix screws

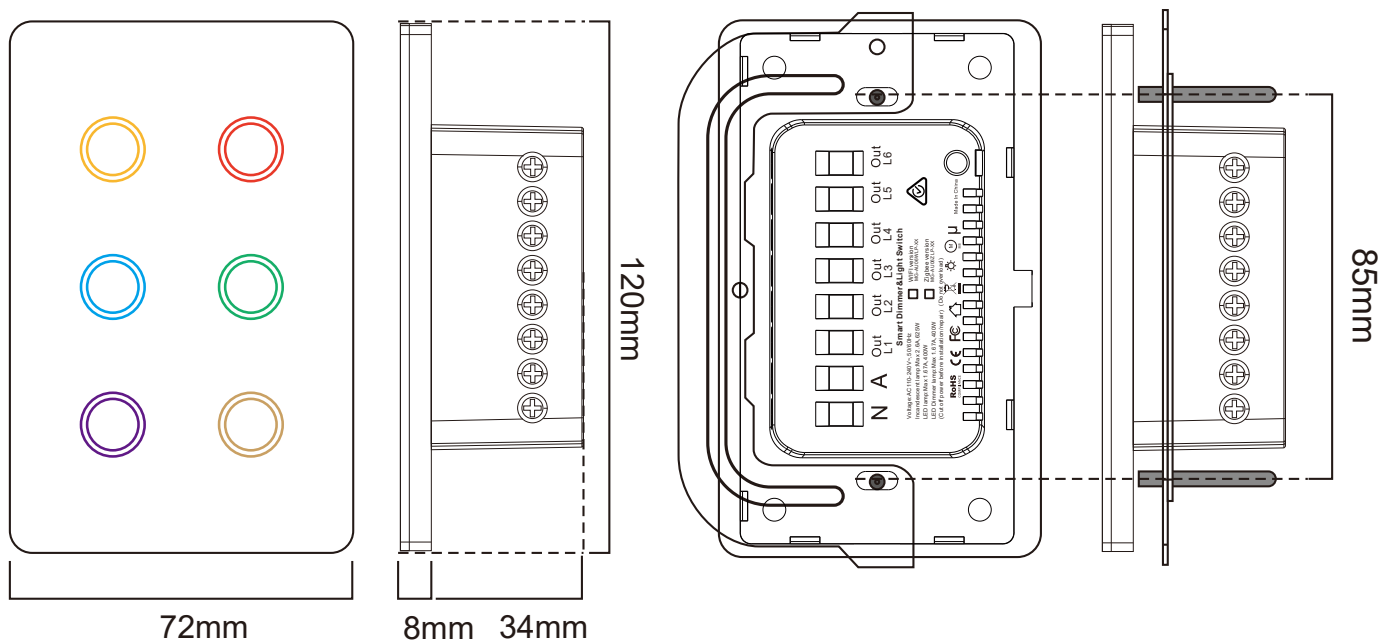

⑤ Cover the panel and connect the power.



- ① Make sure to use our original screws or use cross shaped flat head screws,
- ② Do not fix the screws too tight, as too tight will cause the shell to deform and it will not working,
- ③ After the glass panel is covered, please check whether it is tightly attached to the bottom shell. if not, it will not working
- ④ Turn on general power

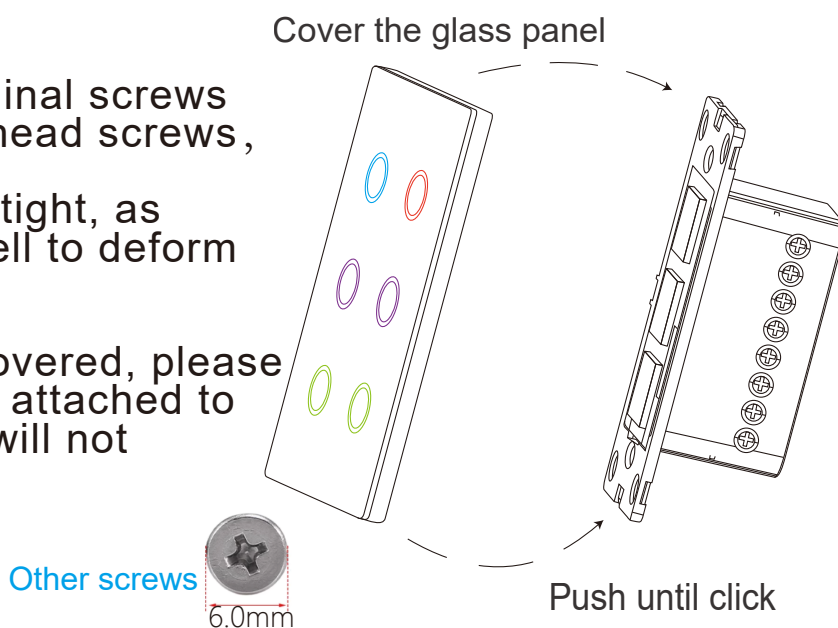

3Gang for example

Neutral

Active

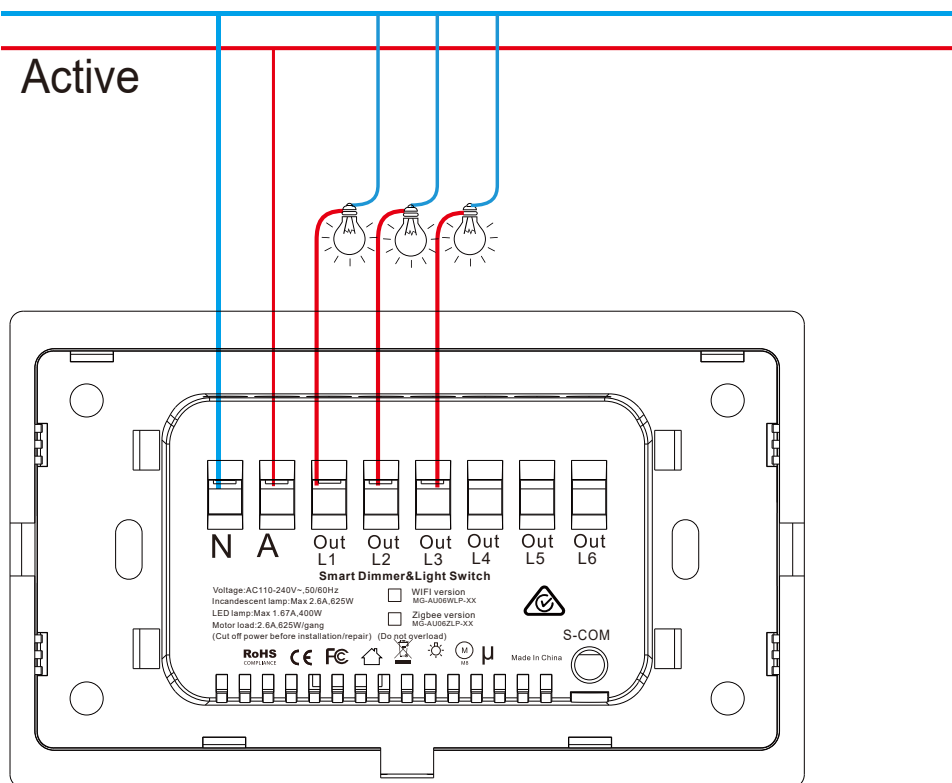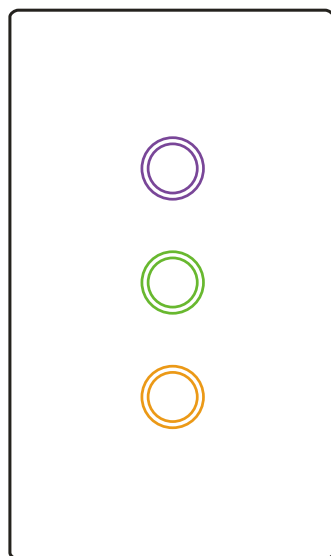

③ 1gang 3way Wiring diagram(For example)


Neutral

Active

Light

Notes:

1. All Active connections must be on the same phase
2. The Max. 5ways.
3. Total length of S-COME and Active loop: max. 50 m.
4. Control and load cable must not be coupled.
5. The dip switch have to turn on.

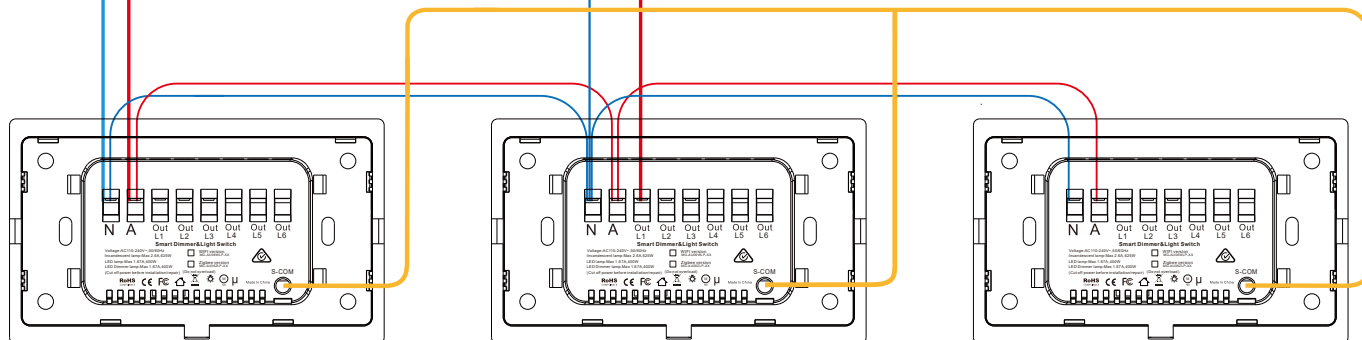


Features


- ① High quality tempered glass panel design, always look as new.
- ② With RGB LED indicator, you can change the color by APP.
- ③ Momentary switch function (Dimming the light)
- ④ Child lock.
- ⑤ Support 2way~5way.
- ⑥ Memory the last state.
- ⑦ Turn on/off backlight
- ⑧ Power metering.
- ⑨ Multiple themes selection (Dark/Light)
- ⑩ Support Amazon Alexa and Google Assistant ,etc.

Installation

- ① Open the front cover by a small flat screwdriver

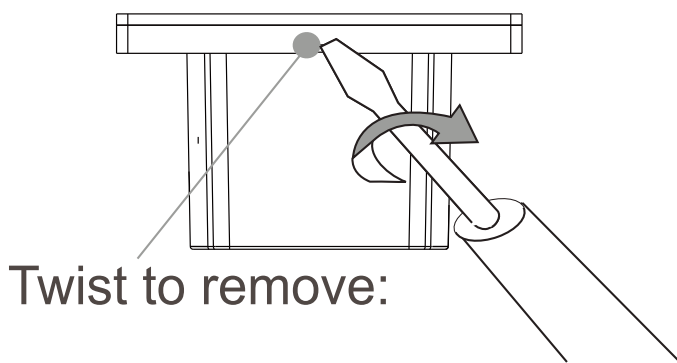

- ① Or magnetic opening installation

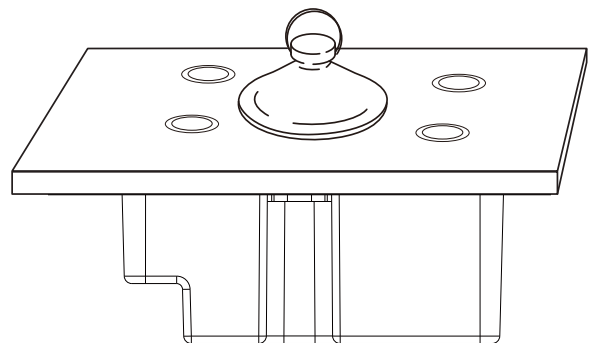

- ② Wiring diagram
Connect wire to the correct terminal and tighten the screws.

SMART LIGHT SWITCH

User manual



Light Switch Series
1Gang 2Gang 3Gang 4Gang 5Gang 6Gang

MG-AU04WLPV01-XX, MG-AU04WDPV01-XX	MG-AU04ZLPV01-XX,, MG-AU04ZDPV01-XX
MG-AU04WLMV01-XX, MG-AU04WDMV01-XX	MG-AU04ZLMV01-XX, MG-AU04ZDMV01-XX
MG-AU05WLPV01-XX, MG-AU05WDPV01-XX	MG-AU05ZLPV01-XX, MG-AU05ZDPV01-XX
MG-AU05WLMV01-XX, MG-AU05WDMV01-XX	MG-AU05ZLMV01-XX, MG-AU05ZDMV01-XX
MG-AU06WLPV01-XX, MG-AU06WDPV01-XX	MG-AU06ZLPV01-XX, MG-AU06ZDPV01-XX
MG-AU06WLMV01-XX, MG-AU06WDMV01-XX	MG-AU06ZLMV01-XX, MG-AU06ZDMV01-XX

Warning

- ① To prevent injury, this apparatus must be installed by a Licensed Electrical Contractor.
- ② For indoor used only.
- ③ Please make sure the smart switch is not overloaded.
Working power cannot be higher than the rated power 10A.

Warranty

This warranty covers defects in manufacturing that arise from the correct use of the device. It is limited to defects in materials or workmanship and does not cover damage caused by abuse, misuse, unauthorised modification, power surge damage or extreme heat or cold or corrosive environments.


The warranty also does not cover the normal wear and tear on covers, cases, housings, connectors and accessories. The warranty does not apply to any product with missing, altered or defaced serial numbers.

Your products come with a 24 months manufacturer's warranty as standard.

- End -

Add smart switch to Apple Home

- ① Connect the mini HomePod
- ② Touch on/off button five times consecutively and rapidly then hold the button for 5 seconds until the buttons start to blink rapidly.
- ③ Open“Home”,click“+”,“Add Accessory”, Scan a Setup Code on the switch

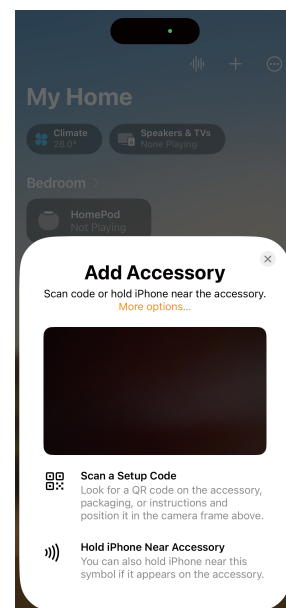


Specification


Dimension	Voltage
120*72*42mm or 124*78*43.5mm	110-240V AC/50~60Hz
Fluorescent lamp	Frequency
Max 2.6A,625W/gang	Wifi or Zigbee 2.4G
LED lamp	Motor
Max 1.67A,400W/gang	Max 2.6A,625W/gang
Wifi version Model NO	Zigbee version Model NO
MG-AU01WLPV01-XX , MG-AU01WDPV01-XX	MG-AU01ZLPV01-XX, MG-AU01ZDPV01-XX
MG-AU01WLMV01-XX , MG-AU01WDMV01-XX	MG-AU01ZLMV01-XX, MG-AU01ZDMV01-XX
MG-AU02WDPV01-XX, MG-AU02WLPV01-XX	MG-AU02ZPV01-XX, MG-AU02ZDPV01-XX
MG-AU02WLMV01-XX, MG-AU02WDMV01-XX	MG-AU02ZLMV01-XX, MG-AU02ZDMV01-XX
MG-AU03WLPV01-XX, MG-AU03WDPV01-XX	MG-AU03ZLPV01-XX, MG-AU03ZDPV01-XX

Add smart switch to Alexa and Google Assistant

Add the Smart Switch to Alexa/Google Assistant following this instructions below: Open Smart Life App, go to "Profile" -> "Integration,tap"Alexa" or "Google Assistant"and install

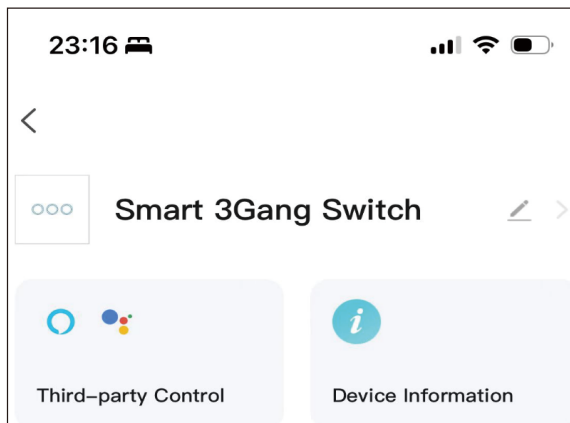


1.Third-party Control

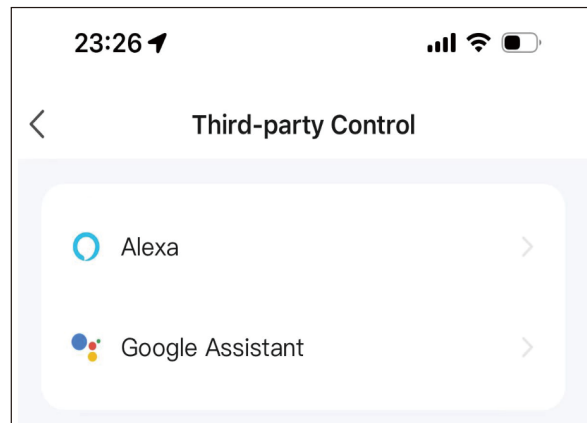


2. Choose Alexa



3. Link to Alexa

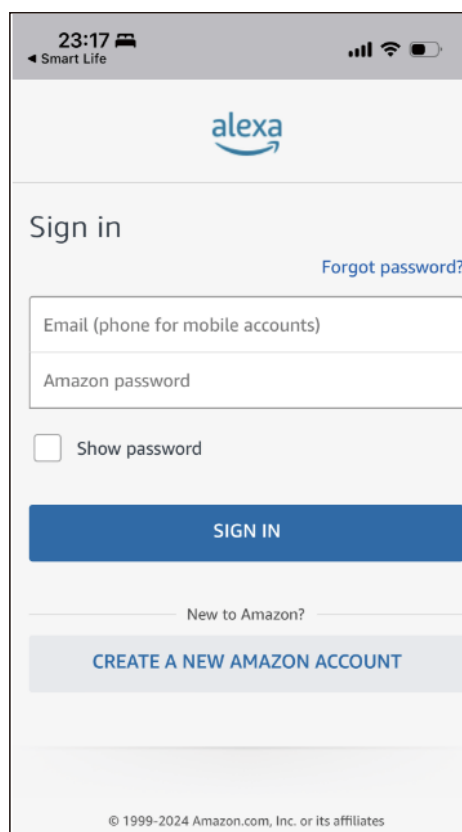

4. Enter account

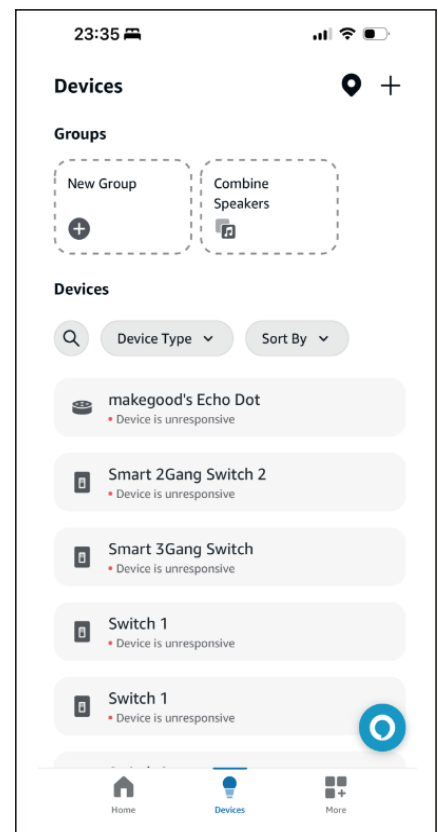

5.Devices list


Power metering function

Electric stats

This allows you to monitor the power usage of connected loads


(current,power,voltage and kWh)

The values show are the total of all gangs per wall plate. These values are for reference only.

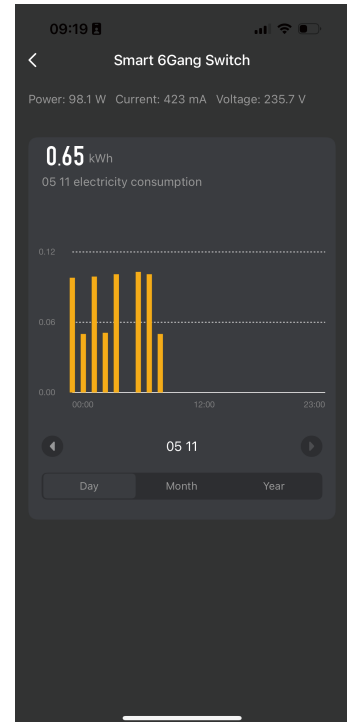


Setting 2way or 4way

Open Smart Life App
go to "Profile"

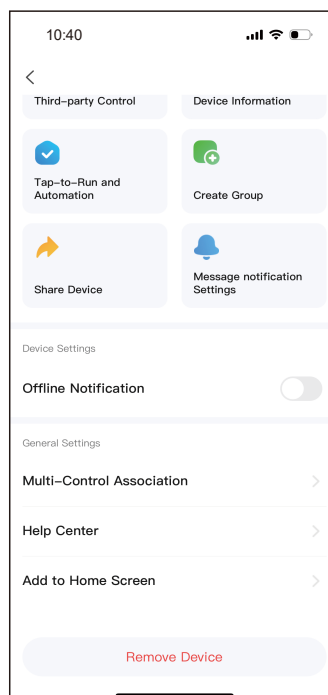


Click "Multi-Control Association"

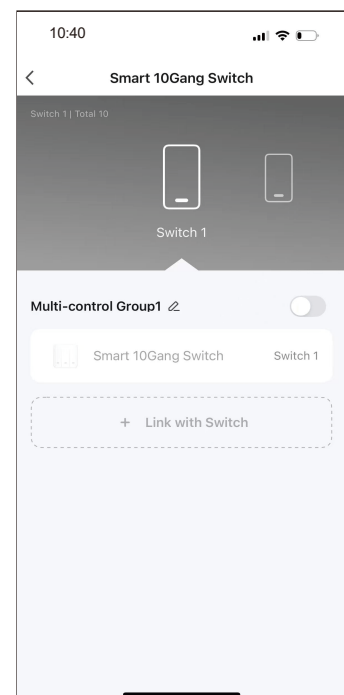


Click "+Link with Switch" to association

- ① Smart switch have to connect with the smart dimmer module
- ② Open the "momentary function" on APP setting
- ③ Touch for ON/OFF, long press for dimming


Other functions

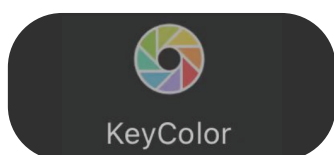

Adjust RGB backlight

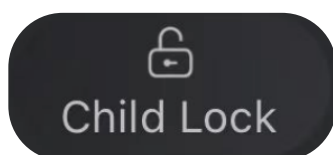


Child lock

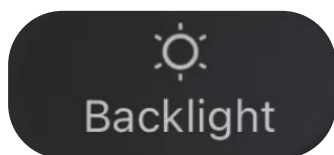


Turn on/off backlight




Multiple Themes
selection (Dark/Light)

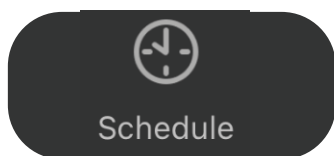

Schedule

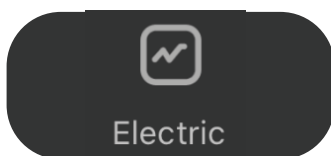


Electric

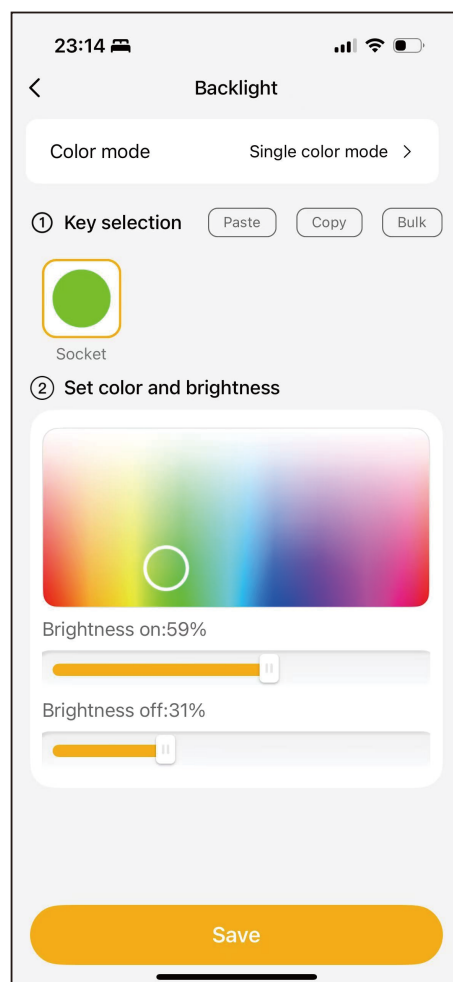



- ⑤ Using your smart life app you can turn this device ON/OFF. Multiple Theme selection (Dark/Light)

Press icon longer can be changed

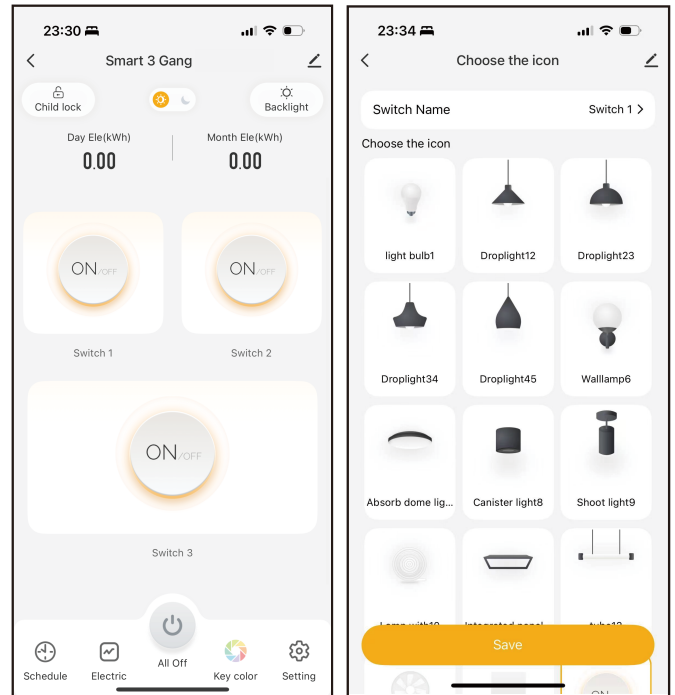

How is the momentary function working

Advantage:
Smart dimmer module control by phone

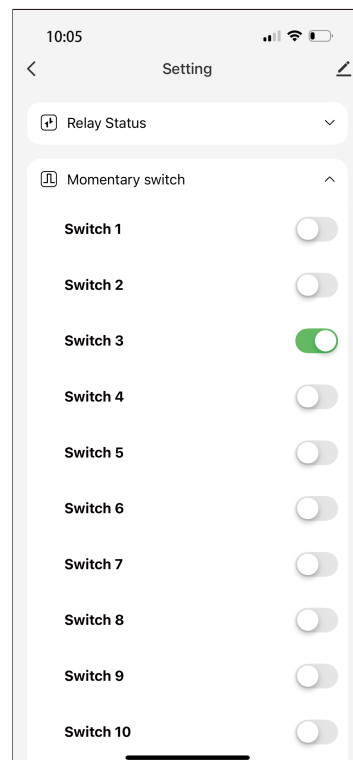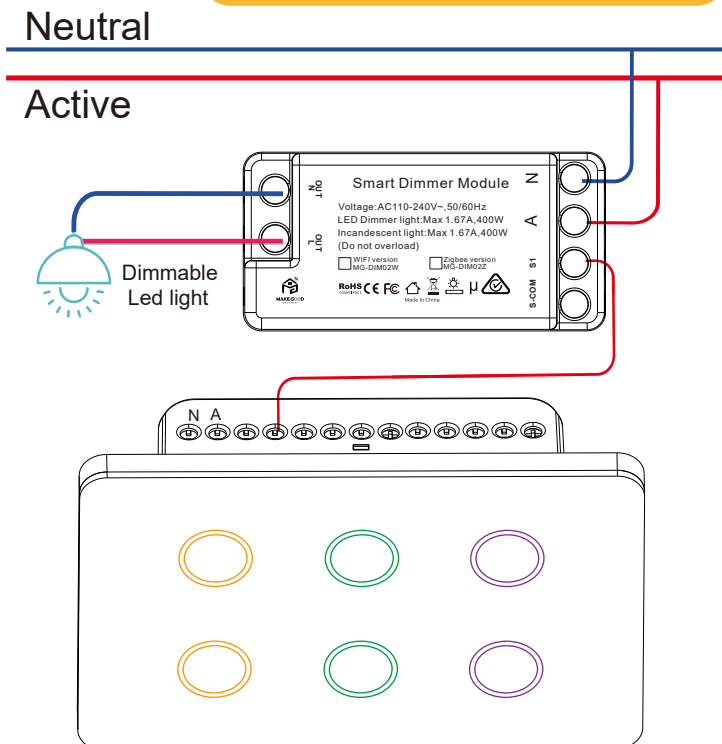


Add Zigbee switch to your App

- ① Use the cable wire to connect the gateway and router
- ② Open "Smart Life", click top right "+"
- ③ Choose "Gateway and others" and choose the "gateway" click next until finished




Zigbee gateway

- ④ Press "⦿" button 5 seconds, the LED indicator will be flashing. Open "smart life", click top right-hand "+", add "Electrician", choose the "Switch(zigbee)", click next and choose the gateway, step by step until finished. Or choose "Smart Gateway", click "Add subdevice" -- "LED already blink, search device", then step by step until finished.

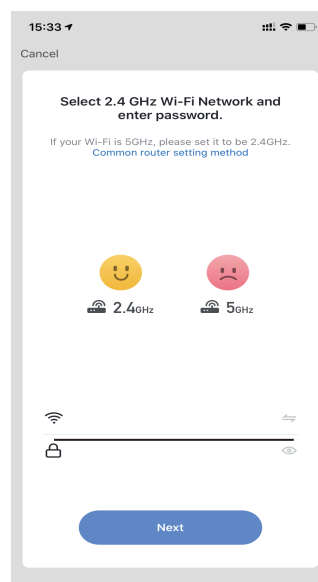

Enter your Wifi password

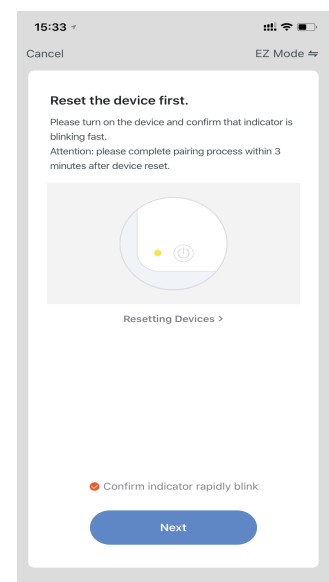

Connection will now begin