
Smart lock manual Tuya Smart Bluetooth system & keypad setting operation Factory mode Put battery Language in Chinese & If is 10 languages, skip this Select English Or few language stage, go via switch language language are being select directly at this stage tand-alone set up admi Press " * #" per the tip **A** nput "000000[†]" Press "*#" "123456# er tips register new admin code. PP add face APP for delete After the front and back plates and the lock body are correctly installed, Restore factory settings: Long press for 3 seconds to enter 000# according to the press for 10 seconds to automatically switch the voice prompt to reset left and right opening Only the automatic Exit setting Or stand-alone mode needs enter again rom physical lock inp lock has this option since other lock's ①Enter motor direction has If there has a unlock & lock button on the RF remote, been determined at long press unlock button enter into paring state, if it Per lock configuration select battery the factory. has the separate set up key, short press the pair key. type System set up -- Battery select RF Remote setting User setting Linkage setting System setting Lock setting 2.Add face 1.Add password, 1.Add Remote This option is available only device paring for products with face card, fingerprint If there are network-related accessories,then the network of the corresponding 2.Add face 6.Delete face accessories; 5.Delete fingerprint Language in Chinese & English Ör few languages are being select directly at this stage, If is 10 languages, when hear Setting whether to turn "language setting tips", input language code number; This option is on the functions of A A functions:Admin use any type unlock ways unlocked, digit 5 light up as normal available only for products with face openOnly the self-auto features lock has this function Admin not use as the stand-alone delete function, only APP fixed as pointed delete The users' delete as the corresponding merge delete, that means delete card will as delete all the user card. Menu process "*" --Return or exit "#" --confirm, continue or list voice replay "0" -- Cyclic page turning (products with a display and a long menu will have this function)

Installation Notes






Q


Kindly confirm the door's interior thickness. (Must be between 35 mm to 50 mm)

> Door thickness shall be 35mm to 50mm

Different thickness might not be suitable



Hold the front body to the door, and make sure the key nail pieceand cable through the door hole




When installing the lock body on the door The hole of the cylinder iron plate should be

The latch bolt should be in the retracted position

Installation Guide

© ⊚ ⊙

Right knob open with dot to the left

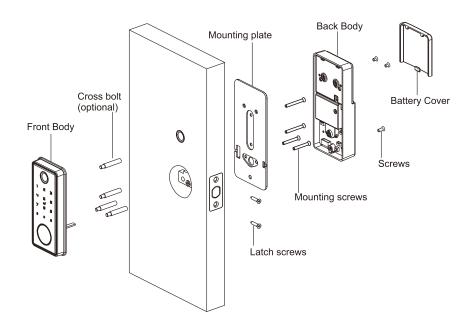

Toggle on L position

Left knob with dot to the right

Material	Aluminum alloy		Model NO.	T1
Door thickness	35mm-50mm		Code Length	4~10 digits
Working Temperature	-20°C~70°C		Working Humidity	20%~80%RH
Working Power Consumption	<200mA		Static Power Consumption	<30uA
Power Supply	6V (4pcs AA Alkaline Batteries not included)			
Unlocking Methods	App Access, Fingerprint, Card, Password & Mechanical Key			
User Capacity	1 Administrators			
	Fingerprint (50)/ Card (50)/ Password (50)			
	Unlimited App temperary passwords			
Product Dimension	Front	64(W) x 144(H) x 17(D) mm		
	Back	73(W) x 161(H) x 48(D) mm		

[★] All specifications are subject to change without notice. All rights reserved.